


TB38M 50Hz POWERED BY BAUDOUIN SERIES

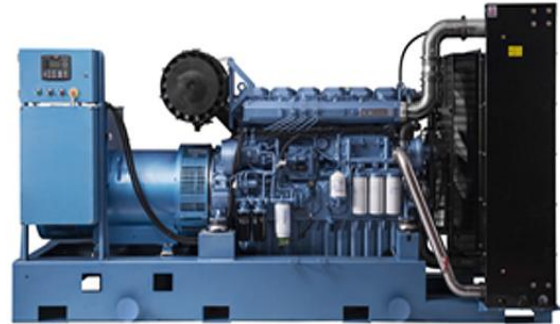

TECHNICAL SPECIFICATIONS

DIESEL GENERATING SET 400/230V-50Hz-3Phase

Model	TB38M	
Power(ESP)	kVA/kw	33/26.4
Power(PRP)	kVA/kw	30/24
Starter Voltage	V	12
Rated Current	A	48
Rated rotation speed	r/min	1500
Power Factor		0.8
Fuel Consumption	L / h	/
Fuel Tank Capacity	L	
Noise level	dB(A)@1m	

WEIGHT AND DIMENSIONS

GEN-Set	Dimension (L*W*H)	Weight
Open Type		
Silent Type	2301*1127*1250mm	862kg

STANDARDS:

Genset: GB/T2820—2009,ISO8528

Alternator: MECC-ALTE, ECP28 VL4 C

Diesel Engine: BAUDOUIN , 4M08G8D3/5

Standby Power: Continues running at variable load for duration of an emergency. No overload is permitted on these ratings.

Prime Power: Continues running at variable load for unlimited periods with 10% overload available for 1 hour in any 12 hour period.

CONFIGURATION:

Standard: Engine, alternator, cooling system, Base frame (excluding fuel tank), shock absorber, air inlet system, control box (including mains floating charge), plastic fan blades (when the engine and water tank do not bring).

Optional: Base frame (including fuel tank), water jacket heater, fuel water separator, fuel heater, fuel level sensor (only supporting underframe tank), switch box (with switch), power switch, the water level sensor, motor anti condensation heater, automatic fueling system (only supporting base frame including fuel tank), battery frame.

Accessories: Silencer, bellow, exhaust silencing system accessories (with the matching engine), regular battery, starting cord assembly, data of gen-set, random tool (with the matching engine).



ENGINE Specification

Manufacturer: BAUDOUIN

Model	4M08G8D3/5
Engine speed Rated	1500 RPM
Cylinder /Arrangement	4/L
Displacement	3.17L
Bore and Stroke	98mm×105 mm
Compression ratio	17.2 : 1
Max. stand by power at rated RPM	36KW
Frequency regulation , steady state	≤±0.5%
Governor : type	ECU
Aspiration and Cooling	Natural

Exhaust System

Exhaust gas flow	6.95m ³ /min
Exhaust temperature before turbocharger	550°C
Max back pressure	110mBar

Fuel System

Fuel consumption100% (of the Prime Power)	/
Fuel consumption75% (of the Prime Power)	/
Fuel consumption50% (of the Prime Power)	/
Fuel consumption110% (of the Prime Power)	/

Oil system


Total oil capacity w/filters	9.2L
------------------------------	------

Air intake

Engine air flow	1.94m ³ /min
-----------------	-------------------------

Coolant System

Engine capacity	5 L
Max water temperature	103°C
Thermostat	72-84°C

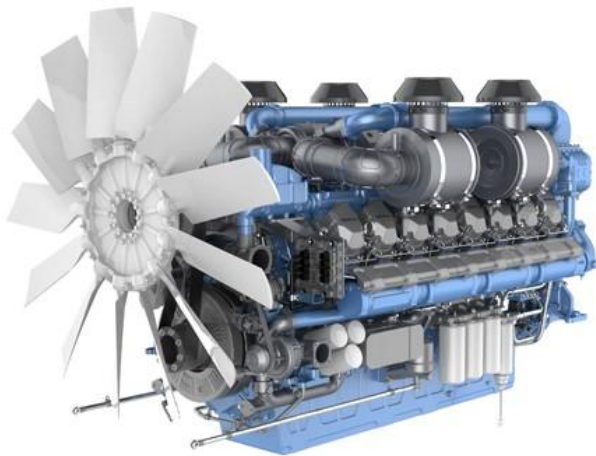

- Core-technology of self-developed ECU which guarantee information safety.
- High reliability , super-long overhaul period for 32000h, superior starting performance
- Professional application & integration capabilities for gen-sets , satisfying high-end users such as data centre.
- Have kinds of domestic product certification

Note: All data sheets are for reference only and subject to change without prior notice.

ALTERNATOR Specification

Manufacturer: MECC-ALTE

Type	ECP28 VL4 C
Number of phase power	3
Factor (Cos Phi)	0.8
Pole	4
Bearing	1
Coupling	Direct
Exciter type	Brushless
Insulation : class , temperature rise	H / H
Degree of protection	IP23
AVR model	DSR
Altitude	≤1000m
Winding Pitch	2/3
Winding Leads	12

FEATURES

- Leading reality in the national scene, fortified by sixty years of experience in the electro mechanical field, Mecc Alte is today at its height in the world production of synchronous alternators.
- Committed daily to research, development and updating activities, Mecc Alte is a testimony to constant improvement in all areas from technology, organisation and quality with its ISO 9001 certification.

STANDARDS

- Marine certifying institutions
Korean Register of Shipping, American Bureau of Shipping, China Classification Society, Germanischer Lloyd, Nippon Kaiji Kyokai, Russian Maritime Register of Shipping.
- Product certifying institutions
CSA International
Underwriters Laboratories
Istituto Marchio di Qualità

Note: All data sheets are for reference only and subject to change without prior notice.



Control Panel

Model: DSE 6120MKIII

AUTO START & AUTO MAINS FAILURE CONTROL MODULES

DIMENSIONS

OVERALL

216mm x 158mm x 43mm
(8.5" x 6.2" x 1.5")

PANEL CUTOUT

184mm x 137mm
(7.2" x 5.3")

MAXIMUM PANEL THICKNESS

8 mm
0.3"



KEY FEATURES

- 4-line back-lit LCD text display
- Multiple display languages
- Five-key menu navigation
- LCD alarm indication
- Customisable power-up text and screen images
- Data logging facility
- Internal PLC editor
- Protections disable feature
- Fully configurable via PC using USB communications
- Front panel configuration with PIN protection
- Power save mode
- 3-phase generator sensing and protection
- 3-phase mains (utility) sensing and protection
- Automatic load transfer control
- Generator current and power monitoring (kW, kvar, kVA, pf)
- Mains (utility) current and power monitoring (kW, kvar, kVA, pf)
- kW overload alarm
- Over current protection
- Breaker control via fascia buttons
- Fuel and start outputs configurable when using CAN
- 6 configurable DC output
- convenience
- Hours counter provides accurate information for monitoring and maintenance periods
- User-friendly set-up and button layout for ease of use
- Multiple parameters are monitored & displayed simultaneously for full visibility
- The module can be configured to suit a wide range of applications for user flexibility
- PLC editor allows user configurable functions to meet user specific application requirements

KEY BENEFITS

- Automatically transfers between mains (utility) and generator for